
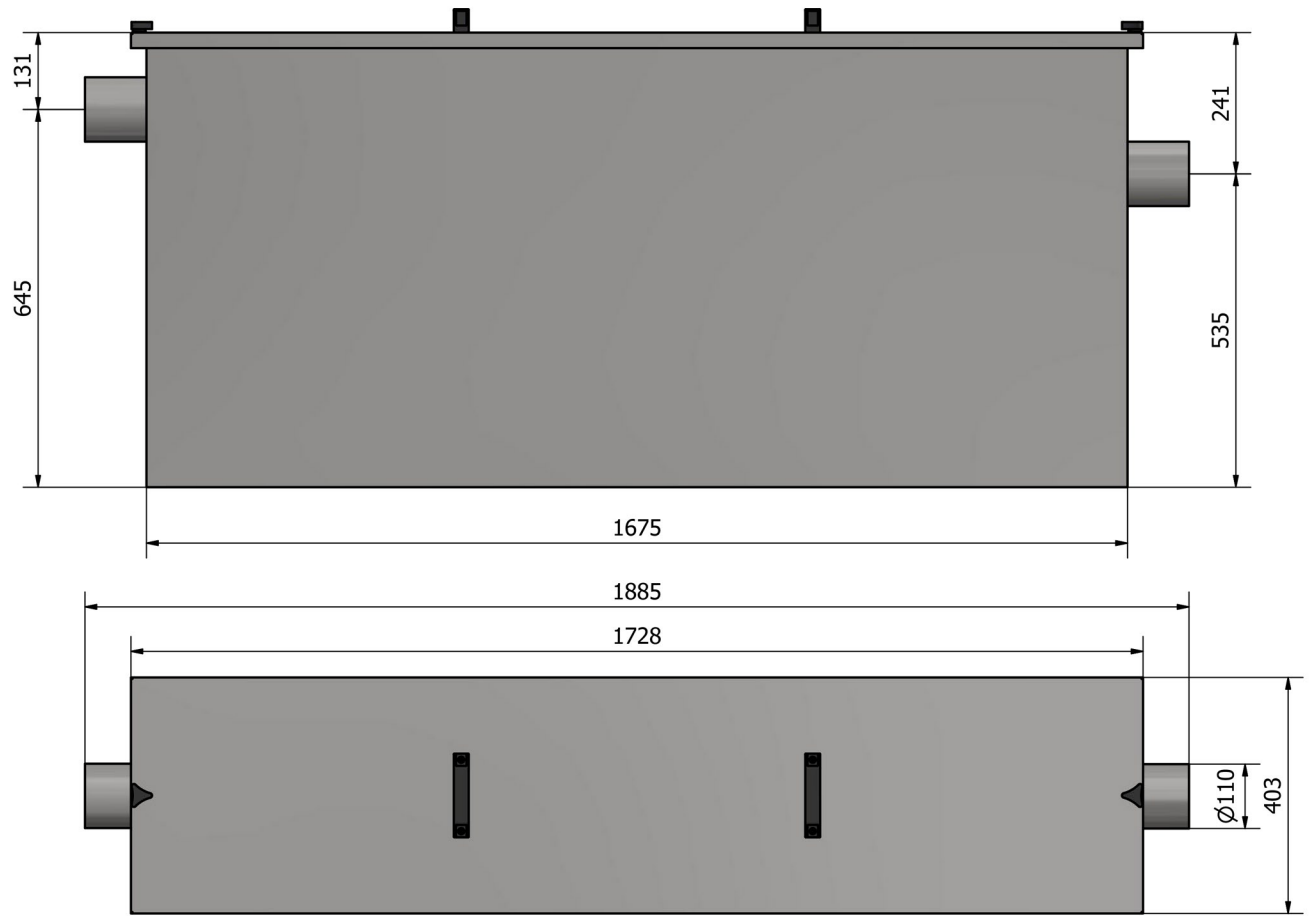


GCT K1700

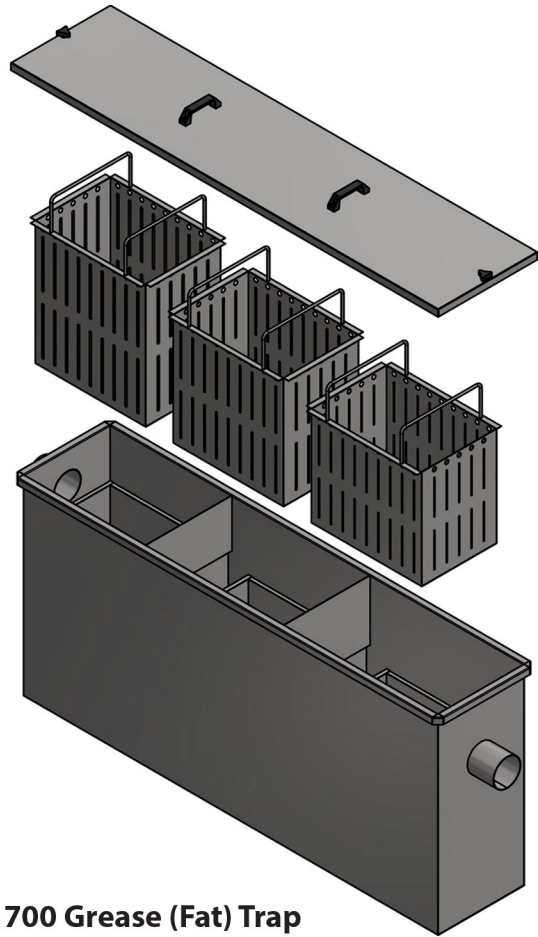

GCT K1700 Grease (Fat) Trap

Features

- Manufactured from 304 stainless steel (316 on special order)
- Three phase solids separation - primary, secondary and tertiary
- Three (3) slotted basket strainer for easy removal of solids
- Compatible with standard plumbing fittings
- One (1) odour sealing cover with polyamide handles
- Smooth surfaces to prevent bacteria build up and promote ease of cleaning
- Suitable for above or below ground installations
- Designed in accordance with SANS 10252-2

Flow Rate: 4.5L/sec

Max Grease Capacity: ≈ 90KG

Net Weight: 74KG

General Applications:

Fast food outlets, restaurants, commercial & industrial kitchens etc

For applications where excessive solids are expected in waste water

