


GCT K1700

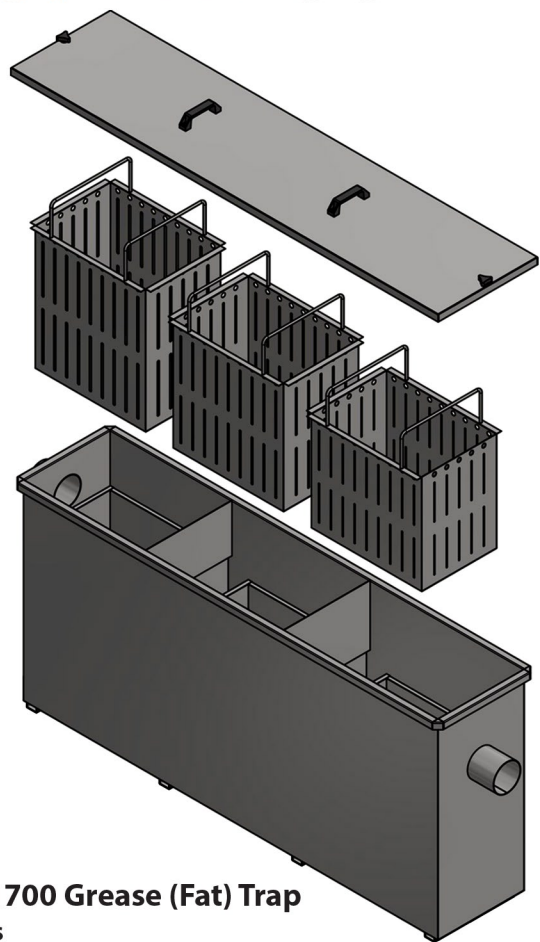

GCT K1700 Grease (Fat) Trap

Features

- Designed to serve 1 - 3 fixtures with a total flow rate ≤ 4.5 litres/ sec
- Manufactured from 304 stainless steel (316 on special order)
- Three-phase solids separation - primary, secondary and tertiary
- Three (3) slotted basket strainers for easy removal of solids
- Compatible with standard plumbing fittings
- One (1) top cover with polyamide handles
- Suitable for above or below ground installations
- Designed in accordance with SANS 10252-2

Flow Rate: 4.5L/sec

Max Grease Capacity: ≈ 70 KG

Total Basket Strainers Volume: ≈ 170 L

Net Weight: 75KG

General Applications:

Fast food outlets, restaurants, medium commercial kitchens etc

For applications where excessive solids are expected in the waste water

