
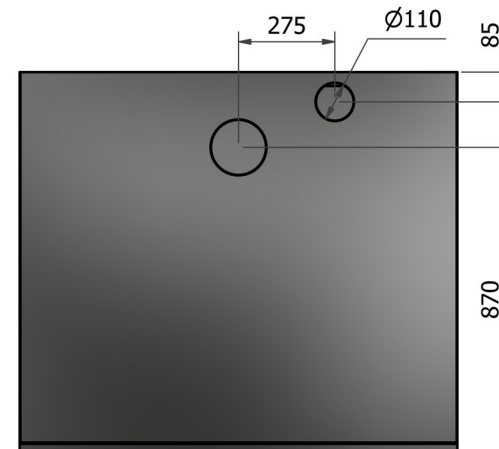
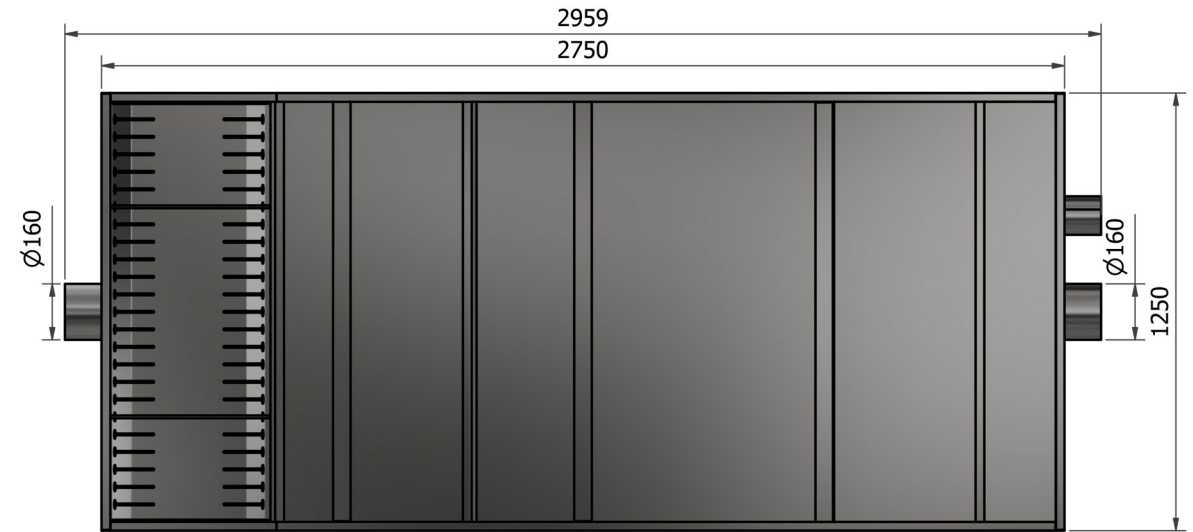
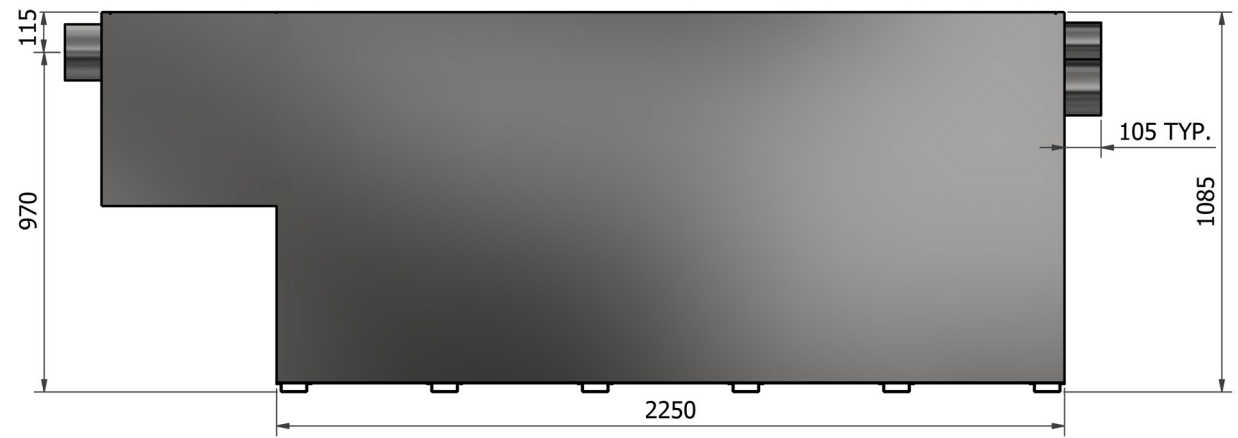


GCT-2G 10L/s/UG

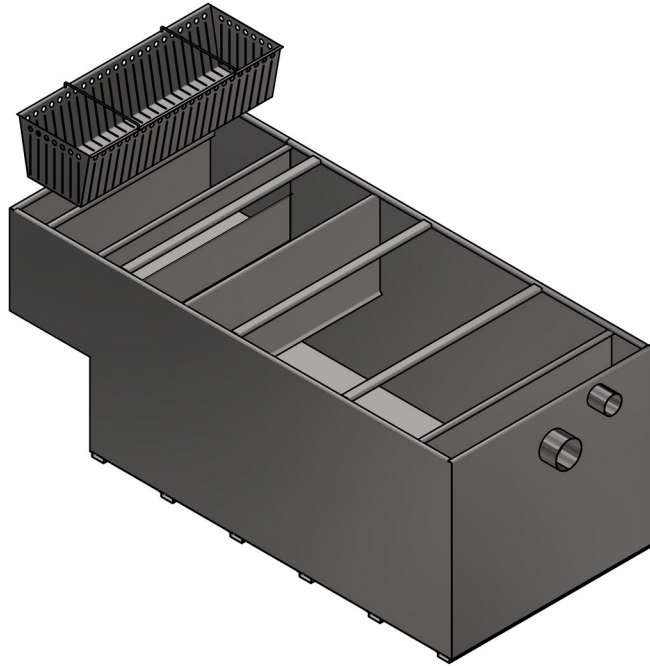

GCT-2G 10L/s/UG Underground Grease (Fat) Trap

Features

- Manufactured from 304 stainless steel (316 on special order)
- Smooth surfaces to prevent bacteria build up and promote ease of cleaning
- Separated sludge trap & grease trap
- Slotted basket strainer for easy removal of solids
- Fully accessible outlet pipe for rodding
- Compatible with standard plumbing fittings
- Chamber vent pipe to prevent airlocking
- Suitable for below ground installations
- 2mm (14 gauge) tank
- SANS 10252-2 compliant

Flow Rate: 10L/sec

Max Grease Capacity: ≈ 400KG

Net Weight: 275KG

General Applications:

Hotels, hospitals, food processing plants, commercial & industrial kitchens etc

***NO LIDS* To be used in conjunction with the GCT-2G 10M cover**