
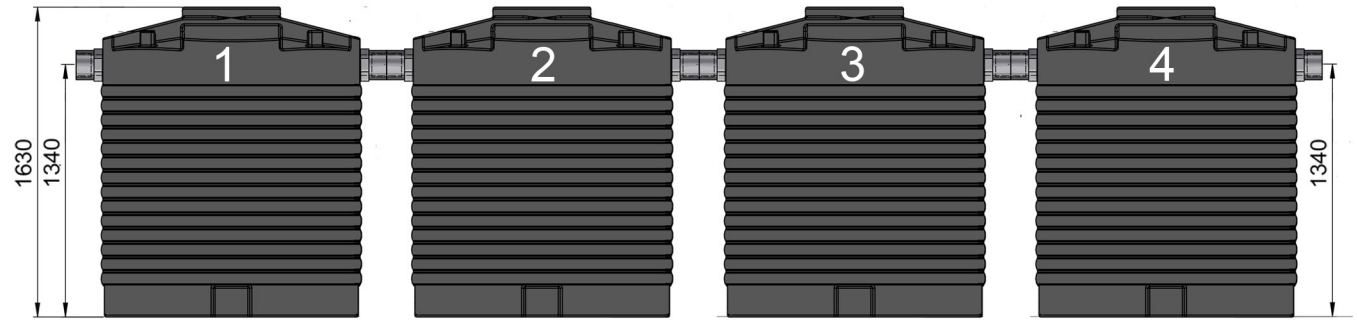


GCT-PE SUPERCEPTOR 20™ Class II

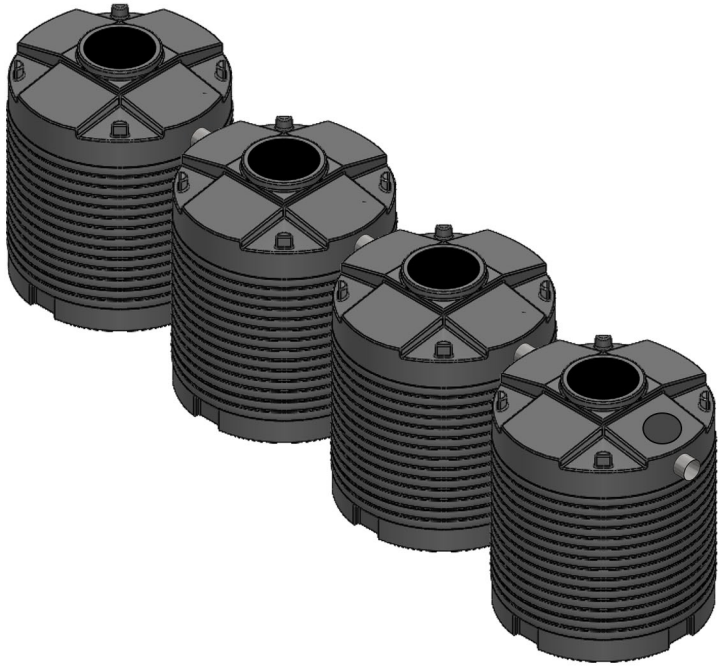

GCT-PE Superceptor 20™ Class II Oil-Water Separator

Features

Class II gravity separator for separation of all free/non-emulsified oils

- Manufactured from high grade LLDPE, SG 1.6
- Two (2) sludge tanks [Tanks 1 and 2]
- Two (2) gravity separation tanks [Tanks 3 and 4]
- Auto-shut-off valve by outlet (Optional)
- Four (4) easily accessible 450mm diameter covers
- Suitable for below ground or free-standing installations
- Designed in accordance with SANS 50858-1 & 2

Flow Rate: 20L/sec (SANS 50858-1 & EN 858-1, 100PPM, Class II Separator)

Total Liquid Capacity: 7500L

Optimal Oil Storage Capacity: 800L

Max Sludge Capacity: 5000L

Net Weight: ≈ 180KG

General Applications:

Forecourts, petro-chemical plants, fuel depots & substations etc

